



Category	Downlights
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Retail
Specification	Performance

Lodi

Lodi Slim Downlight 110 Warm White

Code: ALODLED/110/WW



- Economic circular LED performance downlight suitable for semi-commercial and residential applications
- Ideal for use in areas with shallow ceiling voids
- Low profile design with integral driver
- Supplied pre-wired with 300mm of cable

GENERAL INFORMATION	
Wattage	12W
Lumens Delivered	1200lm
Lm/W	100lm/W
Beam Angle	115
CRI	80
CCT	3000K
Input	220-240V
Operating Temp	-15°C - 25°C
SDCM	6
UGR	30
Cut-Out Size	125mm
Product Weight without Packaging	0.111 kg

TECHNICAL INFORMATION	
Light Source	LED
Colour / Finish	White
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lumen Depreciation	L70 54,000h
Warranty (Years)	2
CE Mark	Yes
Diameter	140 mm
Accessories	ASLED/3NM





Category	Downlights
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Retail
Specification	Performance

Lodi

Lodi Slim Downlight 110 Warm White

Code: ALODLED/110/WW

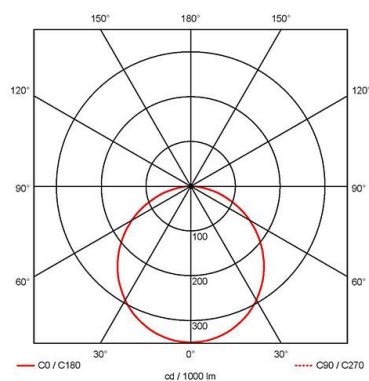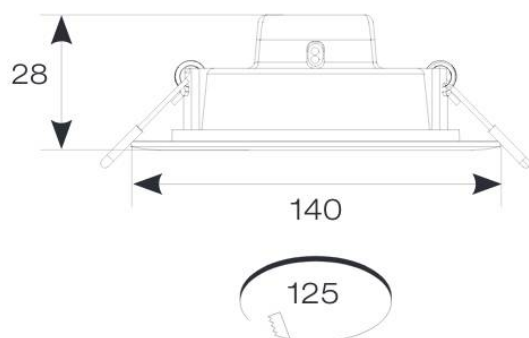

ACCESSORIES

ASLED/3NM

Signal Emergency Downlight Non-Maintained White